

Installation guide













Solenoid valve

Type EV220BW 15-50

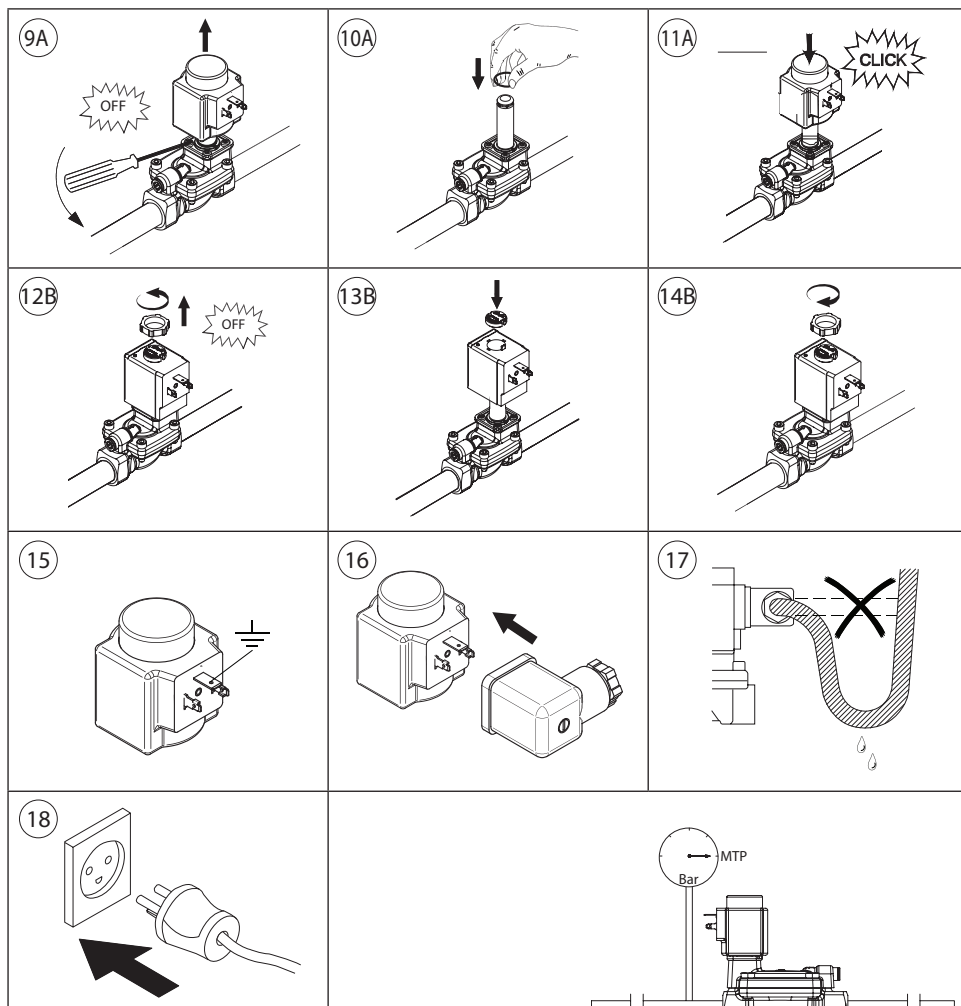
UK
CA

132R9000

132R9000

A 	B 	  ≥ 297 Microns 
1 	2 	3 
4 	5 	6 
7 	8 	

Info for UK customers only: Danfoss Ltd, Oxford Road, UB9 4LH Denham, UK



Drinking water approval			
 1002	CERTIFIERAD	Valid in	Certificate no.
			
	 356 Inspected by DTI		
EV220BW 15-25BE		DK, SE	SCO155-18 *)
EV220BW 15-50SS			
*) http://publiccert.extweb.sp.se/sv/Product/List/ Wetted parts in accordance with DVGW, 4MS, KTW and W270			

DN	Max. Working Pressure (MWP)	Max. Test pressure (PT)
	[bar]	[bar]
15 - 20	10	25
25 - 50	10	25

EN 60730-2-8

Besök www.danfoss.se för mer tekniska data. Besøg www.danfoss.dk for flere tekniske data.

Rendez-vous sur le site www.products.danfoss.fr pour plus de données techniques.

Visit www.products.danfoss.com for further technical data. Para más información, visite www.products.danfoss.es